



# i3TOUCH EX

## Experience

interactive excellence.

#### High end design

The i3TOUCH EX has a refined and sleek design with an ultra-slim bezel and aluminium accents that create a premium look and feel.



#### Natural writing

Enjoy a perfect touch and viewing experience. Thanks to the zero air gap technology we were able to achieve a pen-to-paper feeling.

### Jot down ideas, share with everyone

Create, capture
and share your
ideas or notes in
the integrated
whiteboard solution.
Share your notes
instantly via email,
USB or QR code.







#### Co-create / Learnhub

BIZ studio users can access campfire, and EDU studio users have quick access to i3Learnhub.

#### Magnetic pen holder

Two integrated magnetic pen holders for a more intuitive, more ergonomic, easy reach.

#### Present wirelessly from any device

No more need for additional hardware. Present your screen wirelessly from any device on the i3TOUCH.

All you need is the free app.



#### Multi-function button

A shortcut for different actions: freeze image to hide confidential information, take a screenshot, switch to your preferred video input source, or choose other actions.



#### 8 Years warranty

We are proud of our quality products and so we offer a warranty of up to 8 years, which is exceptional in the market.



#### One cable connection

The i3TOUCH EX is a future-proof solution that allows the latest devices with a USB-C connection to be connected to the screen with one cable for image, power, touch and audio



#### High precision IR

The i3TOUCH EX includes an improved IR technology with a more precise and accurate touch, up to 30% more accurate than regular IR, and improved object recognition.



#### Energy efficient

The combination of a motion and light sensor will optimize your viewing experience to all lighting conditions and keep energy consumption balanced.



#### Intuitive interface

Easily access your apps, change and rename input sources on the home screen, and navigate via the side menu.

PRODUCT INFORMATION	i3TOUCH EX65	75" i3TOUCH EX75	i3TOUCH EX86	
Model name Product series	i3TOUCH Excellence - Interactive Flat P		131OUCH EXOO	
	13100CH Excellence - Interactive Flat F	anei Dispiays		
DISPLAY SPECIFICATIONS				
Display technology	Liquid Crystal Display (LCD) with Direc			
Panel Type	IPS-ADS	IPS-ADS	IPS	
Panel active screen area	1428.5 x 803.5 mm (47.62" x 26.79")	1649.7 x 927.9 mm (56.24" x 31.63")	1895.0 x 1066.0 mm (64.96" x 36.54")	
Display aspect ratio	16:9			
Display native resolution	3840 x 2160 pixels - 4K Ultra High Definition			
Brightness (typical)	400 cd/m²			
Contrast ratio (typical)	1200:1			
Dynamic contrast ratio	4000:1			
Viewing angle	178° / 178°			
Colour depth	1.073 billion colors (10 bit)			
Response time (typ.)	8 ms	8 ms	8 ms	
Refresh rate	60 Hz (@ UHD)			
Pixel pitch	0.372 x 0.372 mm	0.4297 x 0.4297 mm	0.4935 x 0.4935 mm	
Supported orientation	Landscape			
Glass	4 mm Hardened Anti-Reflection Safety (	Glass (MOHS 7)		
Life time				
Integrated loudspeakers	2 x 16 Watt			
Air gap	zero air gap			
ONNECTIVITY				
	4. HDMI 0.0			
Digital audio-video inputs				
Digital audio-video output				
Analogue audio-video input	1x VGA (DE-15 male) + audio jack (3.5 mm TRS connector)			
Analogue audio output	1x audio jack (3.5 mm TRS connector)			
Digital audio output	1x S/PDIF			
USB data ports	1x USB 3.1 Type C (Incl. DisplayPort and Power Delivery up to 45 Watts)			
	1x USB 2.0, 3x USB 3.0			
Integrated PC slot	OPS-PC slot (JAE TX24 connector) 4K @ 60Hz			
Control input	1x COM DE-9 (RS-232 standard)			
Network	LAN: RJ-45 connector (100 Mbit/sec)			
	Wi-Fi: 2.4 / 5 GHz (802.11 a/b/g/n/ac)			
	Bluetooth: 4.2			
OPERATIONAL FEATURES				
	Android™ 8.0			
Operating System				
Architecture	RAM: 3 GB			
	ROM: 32 GB			
	Technology: V-Sense Infrared Touch recognition			
	Input Detection: 20 touch inputs			
Interactive touch	Touch Connection: 2x USB-B			
	Recognition: Finger or passive stylus			
	Response time: < 4 ms (single touch), < 10 ms (max touch inputs)			
	Accuracy: ± 1 mm			
Supported Compatibility	Windows, Android, Macintosh OS X, Linux, Chrome OS			
Maximum operating hours	18 hours / day			
Languages	English, Dutch, French, German, Danish, Polish, Czech, Swedish, Finnish, Norwegian, Spanish, Italian, Portuguese, Greek, Roman Russian, Arabic, Turkish, Ukrainian, Chinese (traditional), Chinese (simplified), Japanese, Korean, Hungarian			
Sensors	Motion Sensor, Light Sensor			

HYSICAL PROPERTIES	65″	<b>75</b> "	86"		
Product dimensions	1489×897×86mm	1710×1020×86mm	1957.2×1160×86mm		
Net product weight	39,65kg	53,70kg	68,85kg		
Packaging size	1656×204×1050mm	1860×280×1170mm	2211×280×1370mm		
Packaged weight	53,70kg	72,00kg	96,45kg		
Mounting pattern	600×400mm	800×400mm	800×600mm		
Color	Black front bezel, black back cabinet				
VARRANTY					
Standard warranty	y 5 years				
Extended warranty	for education entities: 8 years (via registration)				
(optional)	for corporate entities: 8 years (available for purchase)				
ACCESSORIES					
Included	User Manual, Remote Control, Power Supply Cord, HDMI Cable (3 meter), USB cable (5 meter), 2x passive stylus, Wall Mount, WiFi Module, USB-C Cable (1.5 meter)				
0 1	i3FLOORSTAND series – Display stands and floorlifts				
Optional	i3COMPUTER OPS				
	i3ALLSYNC HDMI Transmitter, i3ALLSYNC HDMI Storage				
REGULATORY INFORMATION	N				
Product type approval	CE, FCC				
OFTWARE FEATURES					
i3NOTES Whiteboarding	, ,				
i3OVERLAY Screen annotation	Write on top of every image/app/site & sav	re your content in i3NOTES+			
ELECTRICAL PROPERTIES					
Power voltage	100 ~ 240 Volt - 50/60 Hz				
Power consumption	133 Watt	150 Watt	168 Watt		
ENVIRONMENTAL CONDITI	ons				
Operating temperature	0° C to 40° C				
Operating humidity	10% to 90% RH non-condensing				
Storage temperature	·				
Storage humidity	10% to 90% RH non-condensing				
Maximum operational					
altitude	5,000 meters				
3ALLSYNC REQUIREMENTS	;				
		Client laptop and mobile dev	ice requirements		
	Laptops & Tablet PCs	iPads, iPhones & iPods	Android Tablets & Phones		
Operating System	Windows 10 or newer OSX 10.10 or newe	iOS version 8.0 or newer	Android 6.0 or newer		
	Intel Core 2Duo , 2.3Ghz, 2GB				

#### **NETWORK REQUIREMENTS**


Network and Internet Access


When i3ALLSYNC is deployed into the existing network , the host and the clients require wired or wireless network connection with a minimum bandwidth of 20 Mbps. When running HD content, increase the minimum bandwidth to 50 Mbps. Like any network application, the overall performance is dependent on available bandwidth. Internet access is also required to update the i3ALLSYNC receiver app.

#### FUNCTIONALITY

- Screen mirroring from any device (with minimum requirements)
- $\mathsf{FHD}$  resolution
- Wireless touch function on Windows & MAC OS.


- Support up to 6 split-screens mirroring.
- Support AirPlay and Googe Cast.
- ${\it i3ALLSYNC}$  app available in the Apple store, Play store and on  ${\it i3-allsync.com}$ .
- i3ANNOTATE on all images and save your content in i3NOTES Whiteboard

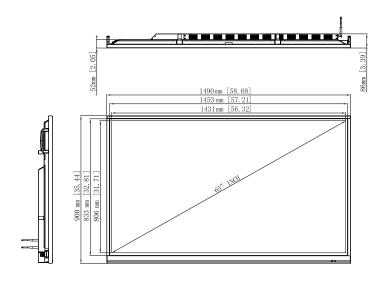


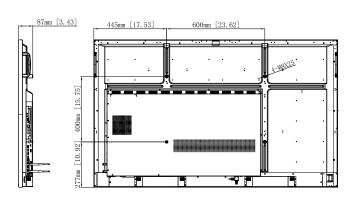



**75**"

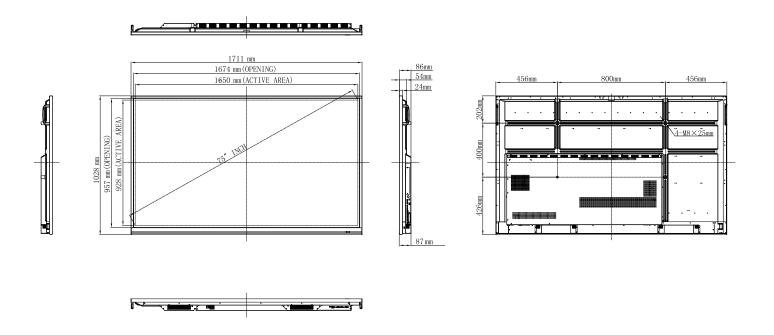

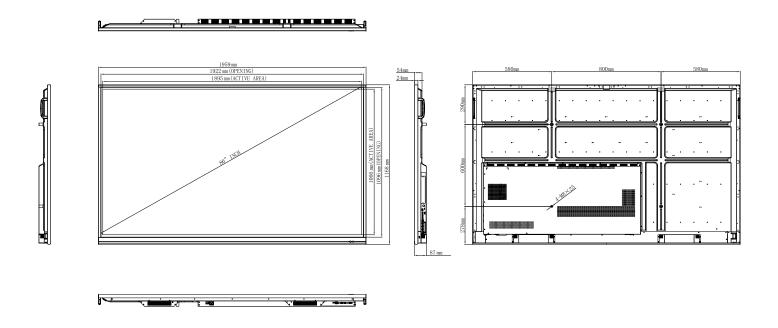

#### Wall mount

